


TAMPER
BT 60/4, BT 65/4

PERFORMANCE DATA

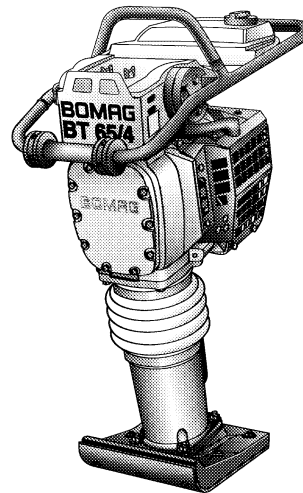

Machine type	Compaction output (m ³ /h)		
	Gravel, sand	Mixed soil	Silt, clay
BT 60/4	11-15	8-11	6-9
BT 65/4	13-17	8-12	7-10

Technical Data

Shipping dimensions in m3


BT 60/4	0,247
BT 65/4	0,257

Standard Equipment

- Engine Protection System
 - Protective engine covering
 - Two-stage double air filter system
 - Automatic oil level control
- Dual fuel filter system
- Vibration insulated steering bow
- Self-cleaning air filter housing
- Protective covering
- Single point lifting device
- Recoil starter
- Carrying handles
- Plastic castor as loading aid
- Infinitely variable frequency
- Engine shut-down switch integrated in steering handle
- 3-2-1 Warranty

Optional Equipment

- Transport device
- Tamper foot widths (160-330mm)
- Tamper foot extensions
- h-/ rpm meter
- Special painting
- Tool kit
- Service Kit



Dimensions in mm

	B	H	L	L1	W
BT 60/4	350	960	735	335	280
BT 65/4	350	1000	735	335	280

Technical Data

Weights

Operating weight CECE	kg	62	68
Basic weight	kg	61	67

Dimensions

Working width (tamper plate)	mm	280	280
------------------------------------	----	-----	-----

Driving Characteristics

Working speed max.	m/min	20	20
Area coverage max.	m ² /h	336	336

Drive

Engine manufacturer	Honda	Honda
Type	GX 100	GX 100
Cooling	air	air
Number of cylinders	1	1
Performance ISO 9249	2,3	2,3
Speed	4.200	4.200
Fuel	gasoline	gasoline
Drive system	mech.	mech.

Exciter system

Frequency	Hz	10- 11,8	10- 11,8
Impact force	kN	13,5	16,2

Capacities

Fuel	l	3,0	3,0
------------	---	-----	-----

Technical modifications reserved. Machines may be shown with options.

