



- 50mm softwood sheet floor
- Spring assist ramps as standard
- Lockable steel toolbox
- Durbar sheeted beavertail with grip bars
- Standard 700mm (2'4" wide) ramps
- Steel strap ramp supports
- Rope hooks and chime bars standard
- Galvanised drawbar boot & toolbox door.
- Hydraulic Brakes
- Park brake
- Full road lights
- Sprung drawbar standard (Except 9T)
- Hose Stowage
- Fixed towing Eye
- 215/75/17.5 Twin Wheels
- GVW up to 24T




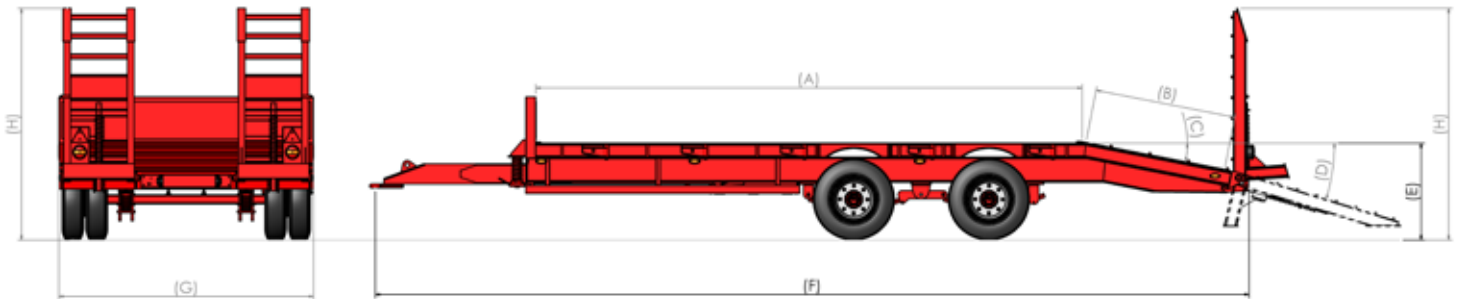

Low Loaders

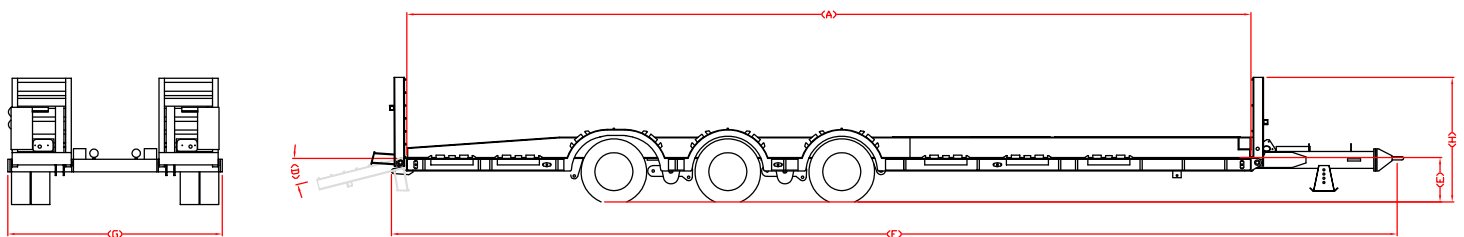

Forestry trailer

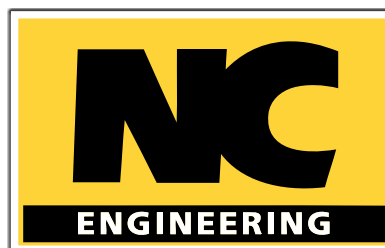

	MODEL	Bed size (includes headboard) (A)	Beavertail (B)	Beavertail Angle (C)	Ramps (spring assisted)	Ramp Angle (D)	Floor height (E)	Max Length (F)	Width (G)	Height With Ramps (H)	Chassis	Axle	Brakes (Hydraulic)
Single Axle	6 T	13' x 7'	4'	16°	5' x 2'4"	17°	36"	7.28m	2.54m	2.01m	200x75x23 RSC	70mm 6-stud Single axle	300x60
Tandem Axle	7 T	13' x 7'	4'	16°	4'6" x 2'4"	19°	35"	7.26m	2.54m	1.84m	200x75x23 RSC plated	70mm 6-stud Tandem axle	300x60
	9 T	15' x 7'6"	5'	14°	5'7" x 2'4"	15°	37"	8.16m	2.54m	2.20m	200x75x23 RSC plated	70mm 6-stud Tandem axle	300x60
	9 T	15' x 7'6"	5'	11°	5'7" x 2'4"	16°	34"	8.16m	2.54m	2.20m	200x75x23 RSC plated	70mm 6-stud Tandem axle	300x60
	16 T	18' x 8'4"	5'	11°	5'7" x 2'4"	17°	35"	9.10m	2.54m	2.23m	254x146x31 H-Beam	90mm 8-stud Tandem axle	300x90
Tridem Axle	22 T	20' x 8'4"	5'	11°	5'7" x 2'4"	17°	35"	9.69m	2.54m	2.25m	254x146x31 H-Beam	90mm 8-stud Tridem axle	300x90
	25 T	20' x 8'4"	5'	11°	5'7" x 2'4"	17°	35"	9.69m	2.54m	2.25m	254x146x31 H-Beam	100mm 8 Stud Tridem axle	300x90
	28 T	20' x 8'4"	5'	11°	5'7" x 2'4"	17°	35"	9.69m	2.54m	2.25m	Fabricated chassis	100mm 8 Stud Tridem axle	300x135
	30 T	20' x 8'4"	5'	11°	5'7" x 2'4"	17°	35"	9.69m	2.54m	2.265m	Fabricated chassis	100mm 8 Stud Tridem axle	300x135
Forestry Tridem Axle	Forestry	32'10" x 8' 4"	N/A	N/A	3'5" x 2'4"	20°	20"	12.16m	2.54m	1.48m	254x146x31 H-Beam	100mm 8 Stud Tridem c/w Rear Axle	300x90